

# KTX-B

## KINETIC™ FAST-CURE SOLID COLOR BROADCAST SYSTEM


Resinwerks KTX-B is a solid-color broadcast floor coating engineered for heavy-duty environments requiring a fast return-to-service. It provides for enhanced heavy-duty performance while offering superior chemical resistance. Yielding an approximate thickness of 1/16", KTX-B incorporates a unique multi-sized quartz aggregate within the coating matrix for enhanced impact and abrasion resistance. Ideal for industrial and manufacturing applications, KTX-B will provide for a textured surface which can be adjusted depending on the requirements of the application. The finished system is top-coated with a UV stable high-traffic urethane offering superior long-term abrasion resistance. Available in a broad range of standard colors as well as safety colors for integral striping and markings.

### Applications

- Aviation hangers
- Shop floors
- Manufacturing
- Grow Facilities
- Car Dealerships

### Features:

- Excellent UV Stability
- Superior chemical & abrasion resistance
- Low Odor & VOC
- ADA compliant slip coefficient
- Suitable for high-moisture applications

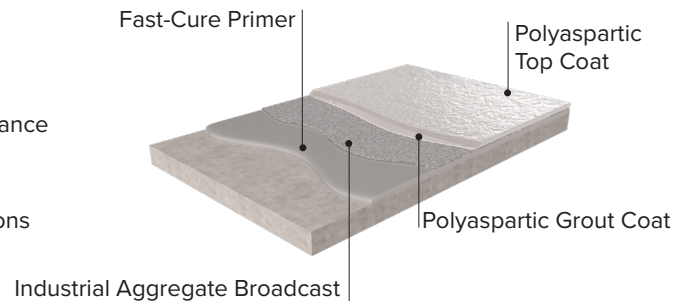

SYSTEM COMPONENTS:	
PRIMER OPTIONS:	
Rapid H2O EP	41% solids water-based primer
Kinetic®	72% Solids Polyaspartic
Kinetic® 85	85% Solids Polyaspartic
Kinetic® HS	Hi-Solids/No-Odor Polyaspartic
BROADCAST & GROUT COAT OPTIONS:	
Kinetic®	72% Solids Polyaspartic
Kinetic® 85	85% Solids Polyaspartic
Kinetic® HS	Hi-Solids/No-Odor Polyaspartic
TOP COAT OPTIONS:	
Kinetic®	72% Solids Polyaspartic
Kinetic® 85	85% Solids Polyaspartic
Kinetic® HS	Hi-Solids/No-Odor Polyaspartic

GENERAL SYSTEM PERFORMANCE - SC-100		
TEST TYPE		RESULT
Compressive Strength	ASTMC 695	7,750 PSI
Water Absorption	ASTMD 570	< .1%
Impact Resistance	ASTMD 2794	> 160
Adhesion Pull-Off	ASTMD-4541	+500 PSI concrete fracture
Elongation / Tensile	ASTMD 638	3500 psi
Flexibility 1/4" cylindrical mandrel	ASTMD 5221	Pass
Hardness / Shore D	ASTMD 2240	92
Taber Abrasion	ASTMD 4060	40 mg loss
Coefficient of Friction	ASTMD-2047	>0.6 / pass

### For Professional Use Only

Please reference all product Technical Data and Material Safety Data Sheets prior to use. Mock-ups are strongly recommended to validate appearance and performance prior to use.

### SURFACE PREPARATION

Ensure substrate to be coated is clean, dry, and in sound condition. All laitance, curing compounds, concrete hardeners, and other surface contaminants must be removed. Prepare concrete in accordance with ASTM D 4259-83. Mechanical shot blasting or planetary grinding is recommended to achieve a surface profile of ICRI CSP 2-3. Surface to be coated must be completely porous, thoroughly vacuumed, and free of excessive dust & contaminants.

### MOISTURE IN CONCRETE

Concrete slabs should be tested prior to application for elevated moisture vapor emission levels. Resinwerks recommends ASTM F2170-19 standard for determining relative humidity in concrete slabs using RH probes. Moisture level results will determine recommended mil thickness for application.

## DE-GREASING OF CONTAMINATED SUBSTRATES

For concrete substrates containing oil, animal fats, or other carbon based contaminants, slabs should be de-greased appropriately using an enzymatic based concrete de-greasing agent. Multiple applications may be required depending on the level of contamination.

## TREATMENT OF JOINTS & CRACKS

Prior to installation of any Resinwerks primer, all joints, cracks and other substrate irregularities must be addressed. For more information on specific joint treatment procedures, please reference Resinwerks joint-treatment guidelines.

## COVE BASE

For projects requiring a perimeter vertical cove base, please reference Resinwerks cove base installation guidelines or contact your local Resinwerks representative for more information.

## COATING APPLICATION

### 1. Primer Options (select one)

#### Rapid H2O EP™

- **Mixing:** Review Rapid H2O EP Data Sheet Prior to mixing. Thoroughly agitate part A and B prior to mixing. Mix 2-parts A to 1-Part B by volume for one minute using a slow speed drill mixer. After 1-minute add 1-gallon of water and mix for a minimum of 2 additional minutes. Adding water is required.
- **Application:** Immediately following mixing, pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee. Standard recommended coverage is 140 sq. ft. per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

--OR--

#### Kinetic™ Polyaspartic

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 1-part A to 1-Part B by volume for 2 minutes using a slow speed jiffy mixer. Be careful not to induce a vortex. Make certain that material is properly mixed. After mixing, material can remain in the bucket until it is ready to be applied.
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee (5-7 mils) or coating broom. Standard recommended coverage is 200 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

--OR--

#### Kinetic™ 85 Polyaspartic

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 1-part A to 1-Part B by volume for 2 minutes using a slow speed jiffy

mixer. Be careful not to induce a vortex. Make certain that material is properly mixed. After mixing, material can remain in the bucket until it is ready to be applied.

- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee (5-7 mils) or coating broom. Standard recommended coverage is 200 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

--OR--

#### Kinetic™ HS Polyaspartic

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 1-part A to 1-Part B by volume for 2 minutes using a slow speed jiffy mixer. Be careful not to induce a vortex. Make certain that material is properly mixed. After mixing, material can remain in the bucket until it is ready to be applied.
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee (5-7 mils) or coating broom. Standard recommended coverage is 180 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

### 2. Broadcast Coat:

#### Kinetic™ Polyaspartic

- **Mixing:** see previous.
- **Pigmenting:** material may be pigmented with Resinwerks universal post-ad pigments at a rate of 10-12 oz pigment per mixed gallon or 1-QT (32 Oz.) for every 3-gallons mixed. Pigment should be added at time of mixing.
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee (5-7 mils) or coating broom. Standard recommended coverage is 200 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

--OR--

#### Kinetic™ 85 Polyaspartic

- **Mixing:** see previous.
- **Pigmenting:** material may be pigmented with Resinwerks universal post-ad pigments at a rate of 10-12 oz pigment per mixed gallon or 1-QT (32 Oz.) for every 3-gallons mixed. Pigment should be added at time of mixing.
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee (5-7 mils) or coating broom. Standard recommended coverage is 200 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions

#### Important:

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat, and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Resinwerks recommends the use of slip-resistant additives in all coating systems that are subject to heavy foot traffic and especially those within wet or oily environments It is the end-user's responsibility to provide flooring that meets current safety standards and local coefficient of friction requirements. Resinwerks nor any of its distributors are responsible for injury resulting from any slip and fall incident.



--OR--

**Kinetic HS Polyaspartic**

- **Mixing:** see previous
- **Pigmenting:** Kinetic HS is available pre-pigmented in standard Resinwerks colors. It may also be pigmented with Resinwerks universal post-ad pigments at a rate of 10-12 oz pigment per mixed gallon or 1-QT (32 Oz.) for every 3-gallons mixed.
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee (5-7 mils) or coating broom. Standard recommended coverage is 200 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

**3. Broadcast:****Resinwerks Mult-Cast "F" or "XF" Aggregate**

- **Aggregates:** Resinwerks offers both a "F" or Fine sized as well as a "XF" or extra-fine sized aggregate for broadcast systems. Aggregate selection is dependent on desired final texture of the system. Please consult you Resinwerks Technical representative for more information.
- **Application:** Broadcast aggregate to rejection at an approximate coverage rate of 1 lb per 1-2 ft<sup>2</sup> (50-100 ft<sup>2</sup> per 50 lb. bag.)

**4. Grout Coat:****Kinetic™ Polyaspartic**

- **Mixing:** see previous
- **Pigmenting:** see previous
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a flat squeegee or coating broom. Standard recommended coverage is 100 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

**Kinetic™ 85 Polyaspartic**

- **Mixing:** see previous.
- **Pigmenting:** see previous
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a flat squeegee or coating broom. Standard recommended coverage is 100 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

**Kinetic HS Polyaspartic**

- **Mixing:** see previous
- **Pigmenting:** see previous

**Important:**

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat, and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Resinwerks recommends the use of slip-resistant additives in all coating systems that are subject to heavy foot traffic and especially those within wet or oily environments It is the end-user's responsibility to provide flooring that meets current safety standards and local coefficient of friction requirements. Resinwerks nor any of its distributors are responsible for injury resulting from any slip and fall incident.

- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a flat squeegee or coating broom. Standard recommended coverage is 100 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

**5. Top Coat:****Kinetic™ Polyaspartic**

- **Mixing:** see previous
- **Pigmenting:** see previous
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a flat squeegee or coating broom. Standard recommended coverage is 150 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

**Kinetic™ 85 Polyaspartic**

- **Mixing:** see previous.
- **Pigmenting:** see previous.
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a flat squeegee or coating broom. Standard recommended coverage is 150 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

**Kinetic HS Polyaspartic**

- **Mixing:** see previous
- **Pigmenting:** see previous
- **Application:** Pour onto substrate in a uniform ribbon and spread evenly with a flat squeegee or coating broom. Standard recommended coverage is 130 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

**6. Traction Additive - Optional**

- Resinwerks traction additives may be incorporated into grout and topcoats depending on desired final finish. Please contact Resinwerks for additional information.

