

EPX-B

EPOXY SOLID COLOR BROADCAST SYSTEM


Resinwerks EPX-S is a heavy-duty solid color broadcast system engineered for superior impact & abrasion resistance. Providing an approximate thickness of 1/16", EPX-B incorporates a unique multi-sized quartz aggregate within the coating matrix for enhanced impact and abrasion resistance. Ideal for industrial and manufacturing applications, EPX-B will provide for a textured surface which can be adjusted depending on the requirements of the application. The finished system is top-coated with a UV stable high-traffic urethane offering superior long-term abrasion resistance. EPX-B is available in a broad range of standard colors as well as safety colors for integral striping and markings. Custom colors are available upon request.

Applications

- Aviation hangers
- Shop floors
- Manufacturing
- Grow Facilities
- Car Dealerships

Features:

- Excellent UV Stability
- Superior chemical & abrasion resistance
- Low Odor & VOC
- ADA compliant slip coefficient
- Suitable for high-moisture applications

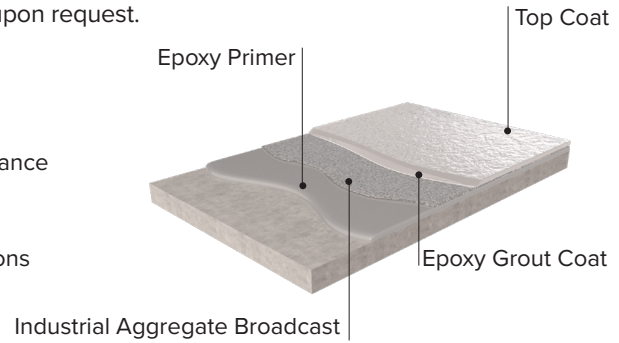

SYSTEM COMPONENTS:	
PRIMER OPTIONS:	
Vapor Barrier Epoxy	100% solids vapor barrier epoxy
BioCure 1100 EP	100% solids epoxy primer/intermediate coat
Rapid H2O EP	41% solids water-based primer
WBE 500	40% solids penetrating primer
BROADCAST & GROUT COAT OPTIONS:	
BioCure 1100 EP	100% solids epoxy primer/intermediate coat
Kinetic HS™	High solids polyaspartic pigmented
TOP COAT OPTIONS:	
HDC 100 Urethane	95% solids 3-component moisture cure urethane
Novolac Epoxy	100% solids acid-resistant epoxy topcoat

GENERAL SYSTEM PERFORMANCE - SC-100		
TEST TYPE		RESULT
Compressive Strength	ASTMC 695	12,500 PSI
Permeability (VBE ONLY)	ASTME 96	0.059 PERMS (grains h-1 ft-2 in Hg-1)
Water Absorption	ASTMD 570	< .1%
Impact Resistance	ASTMD 2794	> 160
Adhesion Pull-Off	ASTMD-4541	+500 PSI concrete fracture
Elongation / Tensile	ASTMD 638	2500 psi
Flexibility 1/4" cylindrical mandrel	ASTMD 5221	Pass
Hardness / Shore D	ASTMD 2240	92
Taber Abrasion	ASTMD 4060	16 mg loss (HDC 100)
Coefficient of Friction	ASTMD-2047	>0.6 / pass

For Professional Use Only

Please reference all product Technical Data and Material Safety Data Sheets prior to use. Mock-ups are strongly recommended to validate appearance and performance prior to use.

SURFACE PREPARATION

Ensure substrate to be coated is clean, dry, and in sound condition. All laitance, curing compounds, concrete hardeners, and other surface contaminants must be removed. Prepare concrete in accordance with ASTM D 4259-83. Mechanical shot blasting or planetary grinding is recommended to achieve a surface profile of ICRI CSP 2-3. Surface to be coated must be completely porous, thoroughly vacuumed, and free of excessive dust & contaminants.

MOISTURE IN CONCRETE

Concrete slabs should be tested prior to application for elevated moisture vapor emission levels. Resinwerks recommends ASTM F2170-19 standard for determining relative humidity in concrete slabs using RH probes. Moisture level results will determine recommended mil thickness for application.

EPX-B

EPOXY SOLID COLOR BROADCAST SYSTEM

DE-GREASING OF CONTAMINATED SUBSTRATES

For concrete substrates containing oil, animal fats, or other carbon based contaminants, slabs should be de-greased appropriately using an enzymatic based concrete de-greasing agent. Multiple applications may be required depending on the level of contamination.

TREATMENT OF JOINTS & CRACKS

Prior to installation of any Resinwerks primer, all joints, cracks and other substrate irregularities must be addressed. For more information on specific joint treatment procedures, please reference Resinwerks joint-treatment guidelines.

COVE BASE

For projects requiring a perimeter vertical cove base, please reference Resinwerks cove base installation guidelines or contact your local Resinwerks representative for more information.

COATING APPLICATION

1. Primer Options (select one)

Vapor Barrier Epoxy

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 2-parts A to 1-Part B by volume for 2-3 minutes using a slow speed jiffy mixer. Make certain that material is properly mixed. Only mix in metal buckets as left-over material can become hot and will melt a plastic bucket. After mixing, get the material out of the bucket and apply material as soon as possible to avoid issues.
- **Application:** Immediately following mixing, pour Vapor Barrier Epoxy onto substrate in a uniform ribbon and spread evenly with a notched squeegee. Apply at a recommended coverage rate of 12-mils or 130 SF/gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.
- Once cured, lightly abrade surface with a black pad or fine sanding screen to remove gloss sheen and any surface contaminants. Vacuum up excess dust and wipe with solvent (xylene or acetone) to prepare for topcoat.

--OR--

BioCure 1100™ Epoxy

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 1-part A to 1-Part B by volume for 2-3 minutes using a slow speed jiffy mixer. Make certain that material is properly mixed. After mixing, get the material out of the bucket as soon as possible to avoid issues.
- **Application:** Immediately following mixing, pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee. Standard recommended coverage is 160 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter

walls or any other obstructions.

--OR--

Rapid H2O EP™

- **Mixing:** Review Rapid H2O EP Data Sheet Prior to mixing. Thoroughly agitate part A and B prior to mixing. Mix 2-parts A to 1-Part B by volume for one minute using a slow speed drill mixer. After 1-minute add 1-gallon of water and mix for a minimum of 2 additional minutes. Adding water is required.
- **Application:** : Immediately following mixing, pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee. Standard recommended coverage is 140 sq. ft. per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

--OR--

WBE 500™

- **Mixing:** Thoroughly agitate part B prior to mixing. Mix 2-parts B to 1-Part A by volume for two minute using a slow speed drill mixer.
- **Application:** : Immediately following mixing, pour onto substrate in a uniform ribbon and roll material evenly over the floor. Standard recommended coverage is 300 sq. ft. per gallon. Back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

2. Broadcast Coat: BioCure 1100™ EP

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 1-part A to 1-Part B by volume for 2-3 minutes using a slow speed jiffy mixer. Make certain that material is properly mixed. After mixing, get the material out of the bucket as soon as possible to avoid issues.
- **Application:** Immediately following mixing, pour onto substrate in a uniform ribbon and spread evenly with a notched squeegee. Standard recommended coverage is 160 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.
- **Broadcast:** Once material has been applied, immediately broadcast to rejection Resinwerks Multi-Cast “F” or “XF” angular industrial aggregate. Broadcast aggregate size will be determined by the application requirements. Once cured, completely remove excess quartz.

3. Grout Coat: BioCure 1100™ EP

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 1-part A to 1-Part B by volume for 2-3 minutes using a slow speed jiffy mixer. Make certain that material is properly mixed. After mixing, get the material out of the bucket as soon as possible to avoid issues.

Important:

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat, and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Resinwerks recommends the use of slip-resistant additives in all coating systems that are subject to heavy foot traffic and especially those within wet or oily environments It is the end-user's responsibility to provide flooring that meets current safety standards and local coefficient of friction requirements. Resinwerks nor any of its distributors are responsible for injury resulting from any slip and fall incident.



www.resinwerks.com

(720) 484-5160
7205 Gilpin Way, Suite #100
Denver, CO 80229

EPX-B

- **Application:** Immediately following mixing, pour onto textured substrate in a uniform ribbon and spread evenly with a flat squeegee. Standard recommended coverage is 80-100 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.

--OR--

Kinetic HS Pigmented

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 1-part A to 1-Part B by volume for 2 minutes using a slow speed jiffy mixer. Be careful not to induce a vortex. Make certain that material is properly mixed. After mixing, material can remain in the bucket until it is ready to be applied.
- **Application:** Immediately following mixing, pour onto textured substrate in a uniform ribbon and spread evenly with a flat squeegee. Standard recommended coverage is 150 ft² per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.
- Kinetic 85 polyaspartic may be substituted depending on project requirements.

3. Top Coat Options: HDC 100™ Urethane

- **Mixing:** Mix complete kit for two minutes using a slow speed jiffy mixer. While mixing pour complete contents of HDC 100 aggregate into mix, taking care to properly suspend all aggregates.
- **Pigmenting:** Add pigment at a rate of 16 oz / 1-pint per full kit. Pigment should be added during mixing.
- **Application:** HDC 100 should be applied at about 3 mils DFT with a coverage rate of approximately 550 square feet per pigmented kit by pan rolling with a 3/8 nap roller. For proper appearance, dip the roller in the coating and lightly roll out excess in the application tray. Take care to spread the material evenly and immediately back-roll in a perpendicular fashion. Frequently agitate material in both the pan and mixing vessel during application process to keep aggregates properly suspended.

--OR--

Novolac Epoxy

- **Mixing:** Thoroughly agitate part A prior to mixing. Mix 2-parts A to 1-Part B by volume for 2-3 minutes using a slow speed jiffy mixer. Make certain that material is properly mixed. After mixing, get the material out of the bucket as soon as possible to avoid issues.
- **Application:** Immediately following mixing, pour onto substrate in a uniform ribbon and spread evenly with a

Important:

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat, and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Resinwerks recommends the use of slip-resistant additives in all coating systems that are subject to heavy foot traffic and especially those within wet or oily environments It is the end-user's responsibility to provide flooring that meets current safety standards and local coefficient of friction requirements. Resinwerks nor any of its distributors are responsible for injury resulting from any slip and fall incident.

EPOXY SOLID COLOR BROADCAST SYSTEM

notched squeegee. Standard recommended coverage is 100 SF per gallon. Immediately back-roll with a non-shedding roller. Use a brush or small roller to cut-in along perimeter walls or any other obstructions.



www.resinwerks.com

(720) 484-5160
7205 Gilpin Way, Suite #100
Denver, CO 80229